


PA6尼龙浪管ROHS Corrugated Tubings

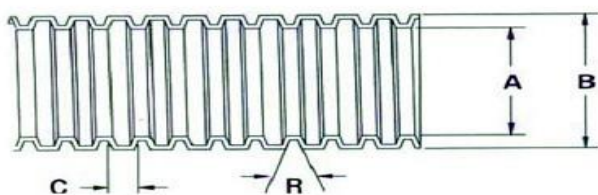

产品材质： 尼龙6

工作温度： -40℃ ~ 150，短时间180度。

产品颜色： 常规黑色。其他颜色均可定做，起订量500米起

产品认证： REACH. ROHS. HB (UL94) , 不含卤素、磷、镉。

阻燃等级： PA常规阻燃V2 (UL94), 可定做 (UL94) V0。

使用方法： 将电线电缆插入管内，在配ZT等软管接头对应的型号使用即可。



单位：M

| 型号-材质 | | 规格 | 内径 I. D. A | 外径 O. D. B | 弯曲半径 R | 包装 Pcs |
|-----------|--------------|--------|---------------|---------------|-----------|-----------|
| PA | PA-V0 | | | | | |
| PA-AD10.0 | PA-AD10.0-V0 | 1/4" | 6.6 | 10 | 16 | 100 |
| PA-AD13.0 | PA-AD13.0-V0 | 5/16" | 10 | 13 | 20 | 100 |
| PA-AD15.8 | PA-AD15.8-V0 | 3/8" | 12 | 15.8 | 30 | 100 |
| PA-AD15.8 | PA-AD15.8-V0 | | 14.3 | 18.5 | 40 | 100 |
| PA-AD21.2 | PA-AD21.2-V0 | 1/2" | 17 | 21.2 | 45 | 100 |
| PA-AD25.0 | PA-AD25.0-V0 | | 20 | 25 | 45 | 50 |
| PA-AD28.5 | PA-AD28.5-V0 | 3/4" | 23 | 28.5 | 50 | 50 |
| PA-AD34.5 | PA-AD34.5-V0 | 1" | 29 | 34.5 | 60 | 50 |
| PA-AD42.5 | PA-AD42.5-V0 | 1 1/4" | 36 | 42.5 | 70 | 50 |
| PA-AD54.5 | PA-AD54.5-V0 | 2" | 48 | 54.5 | 90 | 25 |
| PA-AD74.0 | PA-AD74.0-V0 | 2 1/2" | 63 | 74 | 130 | 10 |
| PA-AD88.0 | PA-AD88.0-V0 | 3" | 76 | 88 | 170 | 10 |
| PA-AD108 | PA-AD108-V0 | 4" | 94 | 108 | 225 | 10 |

